


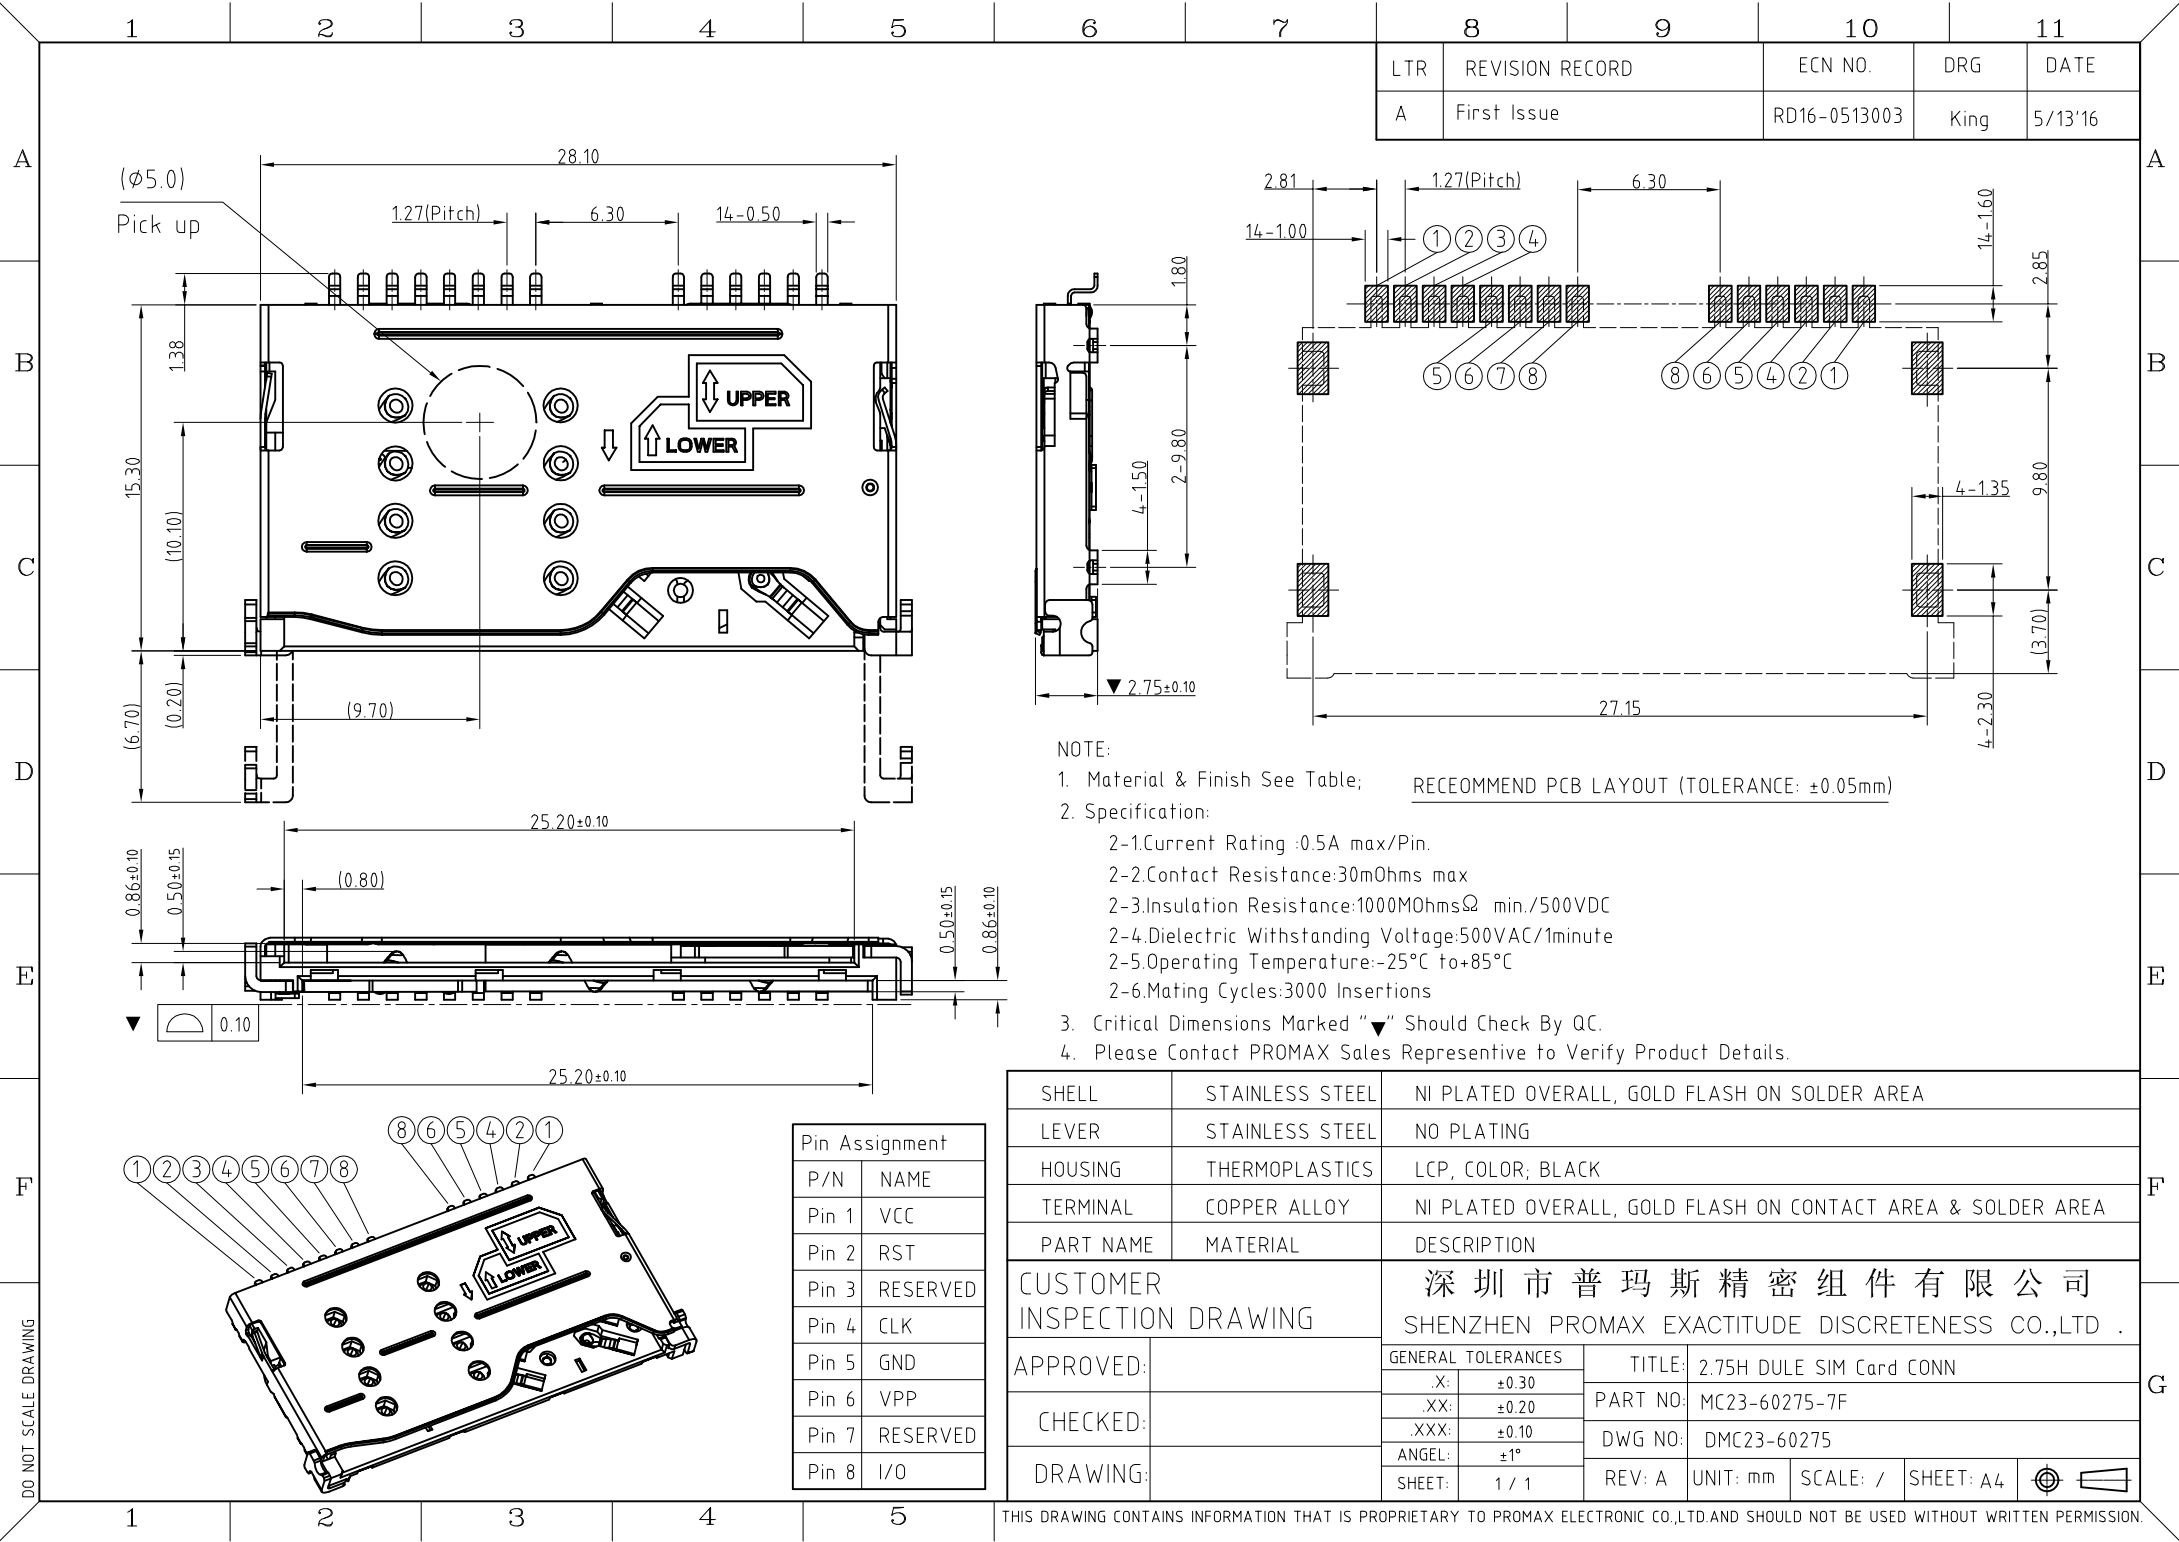

LTR	REVISION RECORD	ECN NO.	DRG	DATE
A	First Issue	RD16-0513003	King	5/13'16

- NOTE:
1. Material & Finish See Table; RECEOMMEND PCB LAYOUT (TOLERANCE: ±0.05mm)
 2. Specification:
 - 2-1.Current Rating :0.5A max/Pin.
 - 2-2.Contact Resistance:30mOhms max
 - 2-3.Insulation Resistance:1000MOhmsΩ min./500VDC
 - 2-4.Dielectric Withstanding Voltage:500VAC/1minute
 - 2-5.Operating Temperature:-25°C to+85°C
 - 2-6.Mating Cycles:3000 Insertions
 3. Critical Dimensions Marked "▼" Should Check By QC.
 4. Please Contact PROMAX Sales Representative to Verify Product Details.

SHELL	STAINLESS STEEL	NI PLATED OVERALL, GOLD FLASH ON SOLDER AREA					
LEVER	STAINLESS STEEL	NO PLATING					
HOUSING	THERMOPLASTICS	LCP, COLOR; BLACK					
TERMINAL	COPPER ALLOY	NI PLATED OVERALL, GOLD FLASH ON CONTACT AREA & SOLDER AREA					
PART NAME	MATERIAL	DESCRIPTION					
CUSTOMER INSPECTION DRAWING		深 圳 市 普 玛 斯 精 密 组 件 有 限 公 司 SHENZHEN PROMAX EXACTITUDE DISCRETENESS CO.,LTD .					
APPROVED:		GENERAL TOLERANCES		TITLE:	2.75H DULE SIM Card CONN		
		.X:	±0.30	PART NO:	MC23-60275-7F		
CHECKED:		.XX:	±0.20	DWG NO:	DMC23-60275		
		.XXX:	±0.10	REV: A	UNIT: mm	SCALE: /	SHEET: A4
DRAWING:		ANGEL:	±1°				
		SHEET:	1 / 1				